

TUSK®

Tusk UTV Fabric Roof Instructions Arctic Cat Wildcat Trail

1. Loosely position the Tusk UTV Fabric Roof over the roll cage of the machine with the “Front” tab toward the front of the machine.

2. Unbuckle the front corner straps from the roof. Loop the front straps around the A-pillar down by the dash and route the strap back through the loop stitched in the end of the strap (see figs. 1, 2 and 3). Cinch the strap down between the two A-pillar bolts as seen in figure 3 to keep the strap in place. Be sure to attach the Velcro strips on each strap to the roll bar and reinsert the male buckle on the strap into the female buckle on the roof. Leave straps loose.

Strap will loop around the frame and route back through the loop stitched on the end of the strap.

Fig. 1



Fig. 2

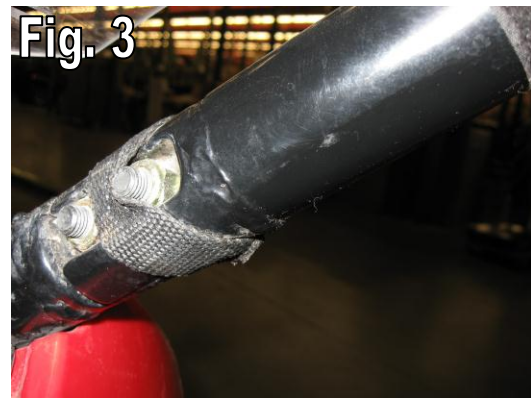


Fig. 3

3. Route each rear corner strap down around the seat belt mounting bracket and loop back up to the female buckle on the roof (see figs 4 and 5).



Fig. 4

(passenger side)

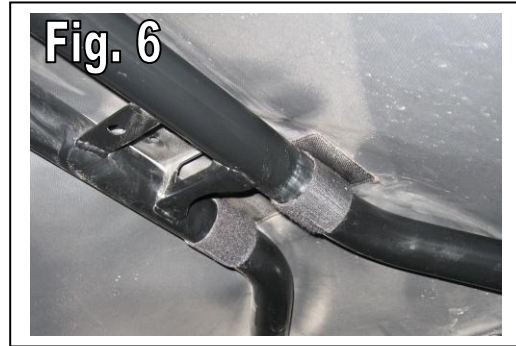


Fig. 5

(passenger side)

4. Attach the Velcro straps on the underside of the roof to the roll cage (see fig. 6).

5. Go around corner by corner and tighten each strap. Be sure to tighten the straps evenly so the roof fits symmetrically and snug on the machine. Be sure to check your work and make sure all straps are tight and secure. If everything looks good, you are now ready to ride with your new Tusk Fabric Roof!



Warning: To ensure the longevity of the Tusk Fabric Roof, it is recommended the roof is removed during transportation (trailing). The Tusk Fabric Roof is equipped with quick-connect straps and buckles for ease in removing and installing the fabric roof.